


Below are the SAE table, please reconfirm it with your customer, and see below table
UCI is bigger in dimensions

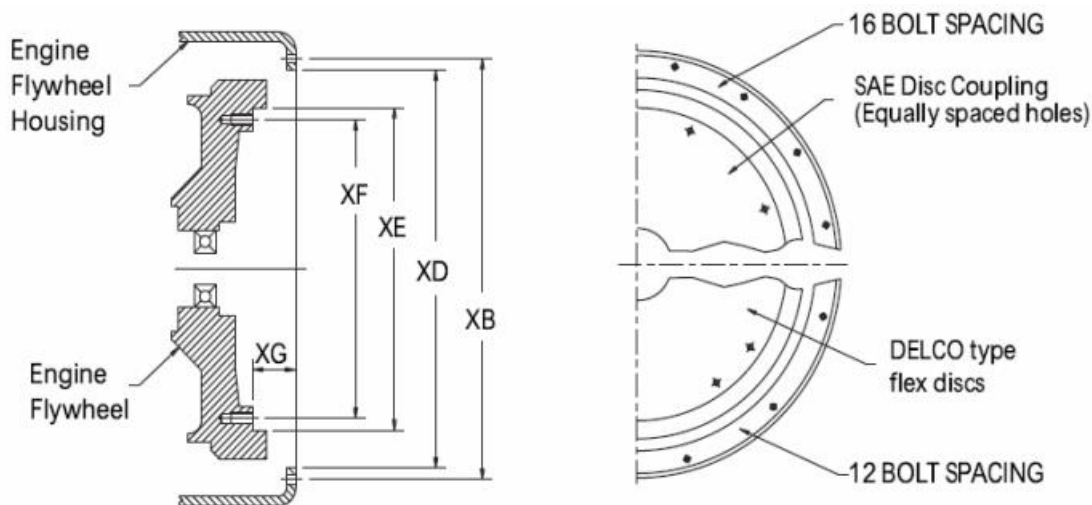

Engine Flywheel Housing Dimensions				
SAE No.	XD	XB	Tapped Holes	
			Qty.	Size
00	31.000 (787)	33.50 (851)	16	1/2-13
0	25.500 (648)	26.75 (679)	16	1/2-13
1/2	23.000 (584)	24.38 (619)	12	1/2-13
1	20.125 (511)	20.88 (530)	12	7/16-14
2	17.625 (448)	18.38 (467)	12	3/8-16
3	16.125 (410)	16.88 (429)	12	3/8-16
4	14.250 (362)	15.00 (381)	12	3/8-16
5	12.375 (314)	13.12 (333)	8	3/8-16
6	10.500 (267)	11.25 (286)	8	3/8-16

Engine Flywheel Dimensions					
Size	XE	XF	XG	Tapped Holes	
				Qty.	Size
SAE 21	26.500 (673)	25.25 (641)	0 (0)	12	5/8-11
SAE 18	22.500 (572)	21.38 (543)	.62 (16)	6	5/8-11
SAE 14	18.375 (467)	17.25 (438)	1.00 (25)	8	1/2-13
SAE 11-1/2	13.875 (352)	13.12 (333)	1.56 (40)	8	3/8-16
SAE 10	12.375 (314)	11.62 (295)	2.12 (54)	8	3/8-16
SAE 8	10.375 (264)	9.62 (244)	2.44 (62)	6	3/8-16
SAE 7-1/2	9.500 (241)	8.75 (222)	1.19 (30)	8	5/16-18
SAE 6-1/2	8.500 (216)	7.88 (200)	1.19 (30)	6	5/16-18
ACDelco®* 17.75	17.755 (451)	15.50 (394)	.72 (18)	8	5/8-11
ACDelco 15.50	15.500 (394)	13.88 (353)	.72 (18)	8	5/8-11
ACDelco 12.75	12.750 (324)	11.00 (279)	0 (0)	4	1/2-13

	Model	AVR	Leads	Weight (lbs)	125/40 (UL 1004)			105/40		
					kW 0.8 PF	kW 1.0 PF	Eff 1.0 PF	kW 0.8 PF	kW 1.0 PF	Eff 1.0 PF
AUX WDG STD	S0L1-D41	AS540	12	236	4.0	5.6	71.6	3.7	5.1	72.4
	S0L1-H41	AS540	12	251	5.3	7.5	75.3	4.9	6.9	76.0
	S0L1-L41	AS540	12	273	6.6	9.3	77.3	6.1	8.6	77.9
	S0L1-P41	AS540	12	284	7.9	11.2	78.3	7.3	10.3	79.0
	S0L2-F41	AS540	12	306	9.0	12.8	80.7	8.3	11.8	81.1
	S0L2-G41	AS540	12	320	10.4	14.6	81.6	9.5	13.5	82.1
	S0L2-M41	AS540	12	351	13	18.3	84.1	11.9	16.8	84.5
	S0L2-P41	AS540	12	375	15.5	22.0	84.4	14.3	20.2	84.8
	S1L2-J41	AS540	12	476	18.2	25.6	84.2	16.7	23.6	84.6
	S1L2-K41	AS540	12	494	20.7	29.3	84.2	19.0	26.9	84.6
	S1L2-N41	AS540	12	529	23.4	33.0	85.3	21.4	30.3	85.7
	S1L2-R41	AS540	12	556	25.9	36.6	86.1	23.8	33.7	86.4
	S1L2-Y41	AS540	12	637	32.4	45.8	86.9	29.8	42.1	87.2
	UCI224C	AS440	12	664	26	33	78.4	24	30	79.3
	UCI224D	AS440	12	686	32	40	80.8	28	35	81.8
	UCI224E	AS440	12	774	36	45	82.5	33	41	83.0
	UCI224F	AS440	12	818	44	56	84.7	40	50	85.3